




## (43645、43640)型条形连接器

(43645、43640) Pressure Welding Bar Connector


间距 (Pitch) : 3.0mm (.118")

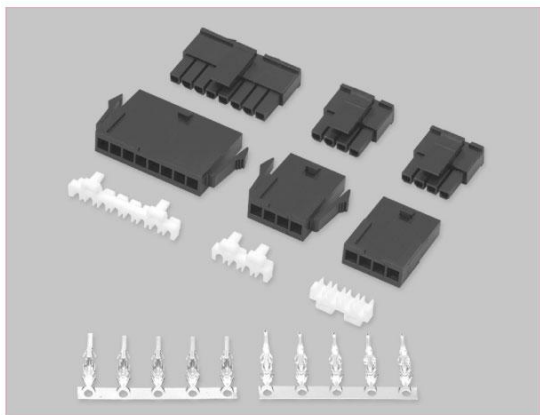


### 端子 TERMINAL (43030、43031)

型号 Type	适用线规 Applicable wires		电线外径 O.D of wire ins mm	数量 Quantity
	mm <sup>2</sup>	AWG#		
HX30001-PT	0.08~0.33	28~22	1.0~1.9	10000PCS/盘
HX30002-RT	0.08~0.33	28~22	1.0~1.9	10000PCS/盘


### HX30001-PT (43030、小5556)



### HX30001-P (43645)




### HX30001-S (43645)

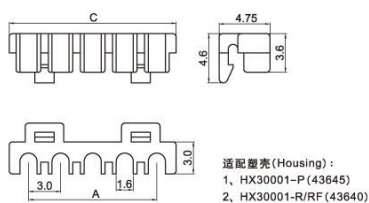


## 技术参数 SPECIFICATIONS

- 线数 (Poles) : 2~12
- 适用线规 (Applicable wires) : AWG28#~22#
- 适应基板厚度 (Applicable PC board thickness) : 1.6mm
- 温度范围 (Temperature range) : -25℃~85℃
- 额定电压 (Voltage rating) : 250V.Ac/Dc
- 额定电流 (Current rating) : 5A max
- 接触电阻 (Contact resistance) : ≤0.015Ω
- 绝缘电阻 (Insulation resistance) : ≥1000MΩ
- 耐压 (Withstand voltage) : 1000V.Ac/1min
- 材料 (Material) :
  - 插头 (Plug Housing) : 尼龙 (PA66) UL94V-2(0)
  - 插座 (Receptacle) : 尼龙 (PA66) UL94V-2(0)
  - 插片 (Retainer) : 尼龙 (PA66) UL94V-0
  - 端子 (Terminal) : 磷青铜 (Phos.bronze Tin/plated)


### HX30002-RT(43031、小5558)

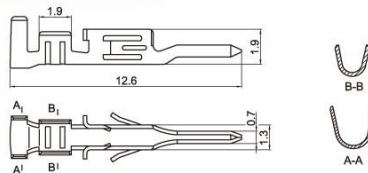

### HX30001-R (43640)

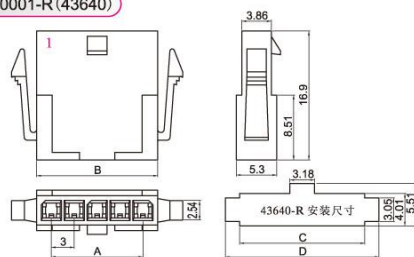

### HX30001-RF (43640)



### 插头 PLUG HOUSING (43645)

线数 Poles	型号 Type	尺寸 Dimensions (mm)		
		A	B	C
2	HX30001-2P/S	3.0	6.8	6.6
3	HX30001-3P/S	6.0	9.8	9.6
4	HX30001-4P/S	9.0	12.8	12.6
5	HX30001-5P/S	12.0	15.8	15.6
6	HX30001-6P/S	15.0	18.8	18.6
7	HX30001-7P/S	18.0	21.8	21.6
8	HX30001-8P/S	21.0	24.8	24.6
9	HX30001-9P/S	24.0	27.8	27.6
10	HX30001-10P/S	27.0	30.8	30.6
11	HX30001-11P/S	30.0	33.8	33.6
12	HX30001-12P/S	33.0	36.8	36.6

### 插座 RECEPTACLE HOUSING (43640)

线数 Poles	型号 Type	尺寸 Dimensions (mm)			
		A	B	C	D
2	HX30001-2R/RF	3.0	6.85	7.21	10.90
3	HX30001-3R/RF	6.0	9.85	10.21	13.89
4	HX30001-4R/RF	9.0	12.85	13.21	16.89
5	HX30001-5R/RF	12.0	15.85	16.21	19.89
6	HX30001-6R/RF	15.0	18.85	19.21	22.88
7	HX30001-7R/RF	18.0	21.85	22.20	25.88
8	HX30001-8R/RF	21.0	24.85	25.20	28.88
9	HX30001-9R/RF	24.0	27.82	28.20	31.88
10	HX30001-10R/RF	27.0	30.85	31.21	34.87
11	HX30001-11R/RF	30.0	33.85	34.21	37.87
12	HX30001-12R/RF	33.0	36.85	37.22	40.87