Product NO.	DOSIN-801-0075-X			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2015/08/05	John kine
B				

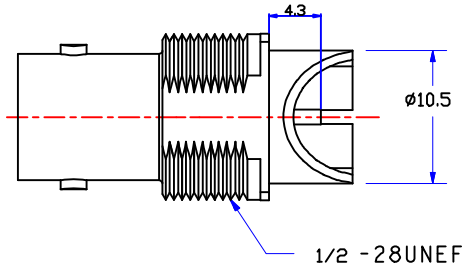





RECOMMENDED
PANEL CUT-OUT

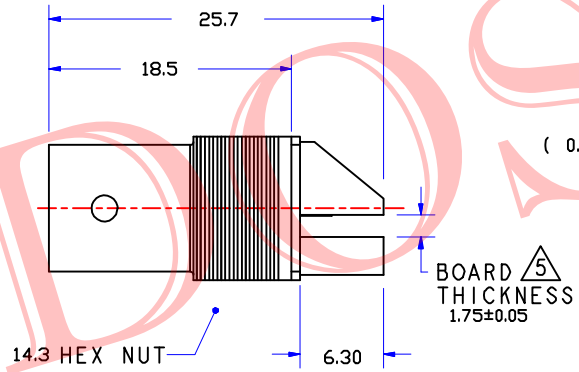

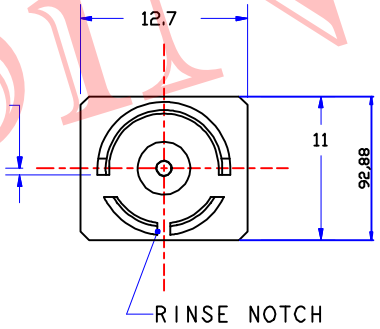



RECOMMENDED
PCB LAYOUT

NO	Material	Finish	Frequeccy Range
A	Brass	Gold:1.5-2mi	DC:0-3G
B	Phosphor copper	Gold:1.5-2mi	DC:3-6G
C	Beryllium copper	Gold:1.5-2mi	DC:6-9G
D	Beryllium copper	Gold:4.5-5mi	DC:9-12G

SPECIFICATIONS:

Impedance: 75 Ohms
Frequency Range:Please refer to the table above
VSWR:1.3max
Working Voltage:500v RMS @ SEA level
Insulation Resistance:5000 Ohms min
Temperature Range:-55℃ TO +155℃
Drawings products are in line with ROHS standards

NO	Component Number	Material	Finish
1	Body	Zinc	Gold:1.5-2mi
2	Contact pin	Please refer to the table above	
3	Insulation	TEFLON	None

NOTE:

DRAWN	Zelin.Zhang	Tolerance	0-6 ±0.10 6-30 ±0.15 30-120 ±0.20 Angular ±5°
CHECKED		View	
APPROVALS		UNIT	MM
		SCALE	1:1

DOSiN RF CONNECTOR Dosin Industrial (H.K) Co. Ltd
东莞市德索五金电子制品有限公司
Dosin Hardware Electronics Co., Ltd
E-mail:dosin20050163.com
dosin2005@dosin-china.com
Web:http://www.dosinconn.com
TEL: (0086)769-81153906
FAX: (0086)769-81875836

Name:	BNC JACK CONNECTOR		
SIZE A	Product NO. DOSIN-801-0075-X		REV A
DateTime 2015/08/05	CAD FILE H/company drawings/BD		SHEET: 1 OF 1

DOSiN