
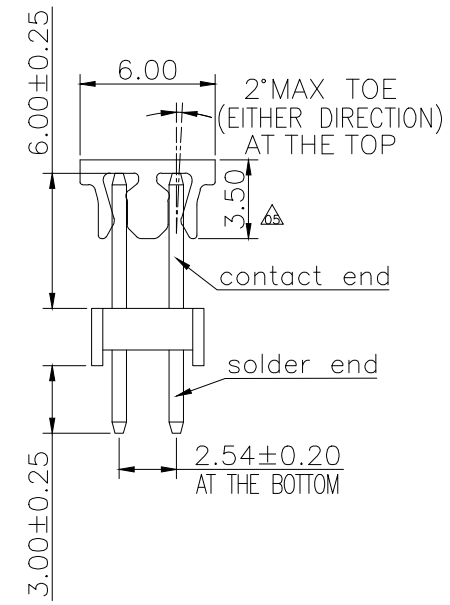
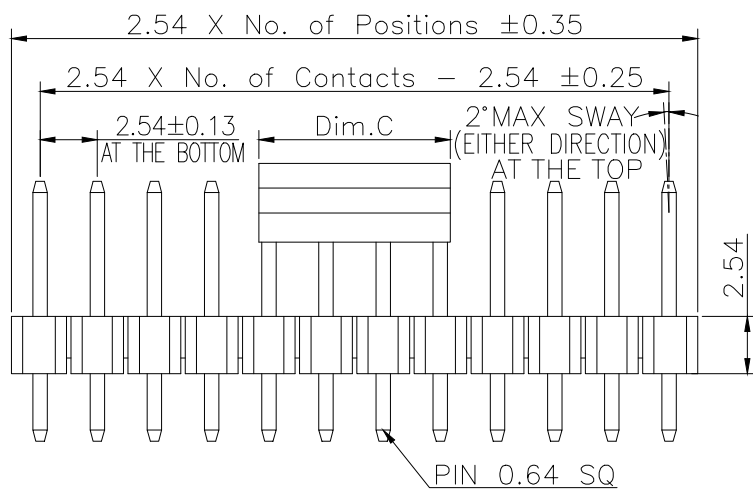


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
02	△△	Change No. of Pins per Row 02~40 01~40	2006.11.17	丁 敏
03	△△	變更料號	2009.04.10	彭思城
04	△△	依上級要求變更圖號	2011.05.11	李芳忠
05	△△	依業務要求增加CAP.	2013.11.14	李芳忠
06	△△	依業務要求修改操作溫度.	2022.12.09	郭 康

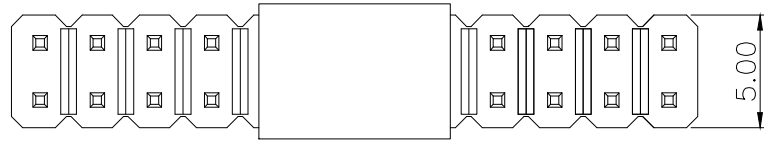

Specifications  
 Current Rating:3Amp  
 Insulation Resistance:1000MΩMin.  
 Dielectric Withstanding Voltage:600VAC  
 Contact Resistance:20mΩMax.  
 Operating Temperature:-40°C to +125°C  
 Materials  
 Contact Material: Brass  
 Insulator Material:Thermoplastic, UL 94V-0  
 PBT or the equivalent material  
 All materials must meet Greenconn  
 requirement for environment protection.

### Ordering Information △

G PHA201 - XX XX A 001 A 1 B X

No. of Pins per Row  
 △ 01~40


Standard Plating  
 02=Gold Flash  
 Selective Plating  
 01=Tin  
 05=Gold Flash/Tin

Color  
 1=Black

Standard Packing  
 A=Box  
 Selective Packing  
 C=Tube  
 E=Cap+Tube  
 F=Cap+Tape&Reel

Dim.C	NOTE
5.00mm	02pin
6.00mm	03~08pins
8.50mm	09~40pins

### Recommended P.C.Board Layout



3RD.ANG PROJ.		GENERAL TOLERANCE	
		X.*±5.0°	X.±0.30
		.X.*±3.0°	.X±0.25
		.XX.*±2.0°	.XX±0.15
		.XXX.*±1.0°	.XXX±0.10

DESIGNED: 郭 康	DATE: 2022.12.09
CHECKED: 張春進	DATE: 2022.12.09
APPROVED: 張春進	DATE: 2022.12.09

DWG. NO.	△△
GPHA201-CA1AB	
PART NO.	△△
GPHA201-XXXX A001A1BX	

TITLE.
2.54 PIN HEADER DUAL ROWS DIP TYPE CONNECTOR

REV.	UNIT.	SCALE.	PAGE.
06	mm	3:1	1/1