


ROHS COMPLIANT

REV.	DESCRIPTION	DATE	ECN NO.
01	NEW DESIGNEN	2019/07/10	-

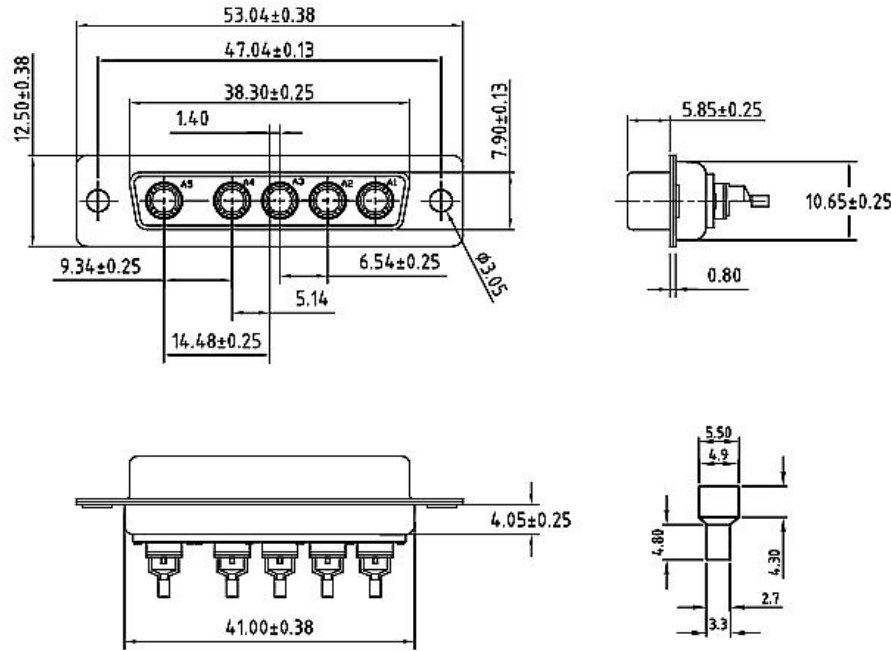

REMARKS:

1. MATERIALS AND FINISH

SHELL : STEEL MATERIAL, FRONT SHEEL NICKEL FINISHED
 NICKEL FINISHED, BACK SHEEL TIN FINISHED
 INSULATOR : PBT THERMOPLASTIC, 30% GLASS
 FILLED, UL 94V-0 RATED
 CONTACT MATERIAL : BRASS
 CONTACT FINISH : FULL GOLD FLASH

2. ELECTRICAL CHARACTERISTICS

CONTACT RESISTANCE : 2.7 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN.
 INSULATION RESISTANCE : 5000 MEGAOHMS MIN.
 TEMPERATURE RATING : -55°C ~ +125°C
 COAXIAL CONTACT IMPEDANCE: 50 OHM

DRAWN:	JEFF.ZHOU	2019.07.10	东莞市赢海电子有限公司
CHECKED:	KEVIN.JIN	2019.07.10	
APPROVED:	JINGUO.YANG	2019.07.10	
	Sheet 1 of 1	Code 000	TITLE:
Dimensions in mm(inches)		Scale 1:1	COAXIAL CONNECTOR_5W5 SOLDER Type(FEMALE)
TOLERANCE UNLESS SPECIFIED: .XX ± 0.13		Angles:±2°	REV. 01 Part No: GDM5W5P-20A180°