



REV	LOCAS	DESCRIPTION	DRAW	DATE
01	NEW	INITIAL RELEASE	LITAO	2016.11.02

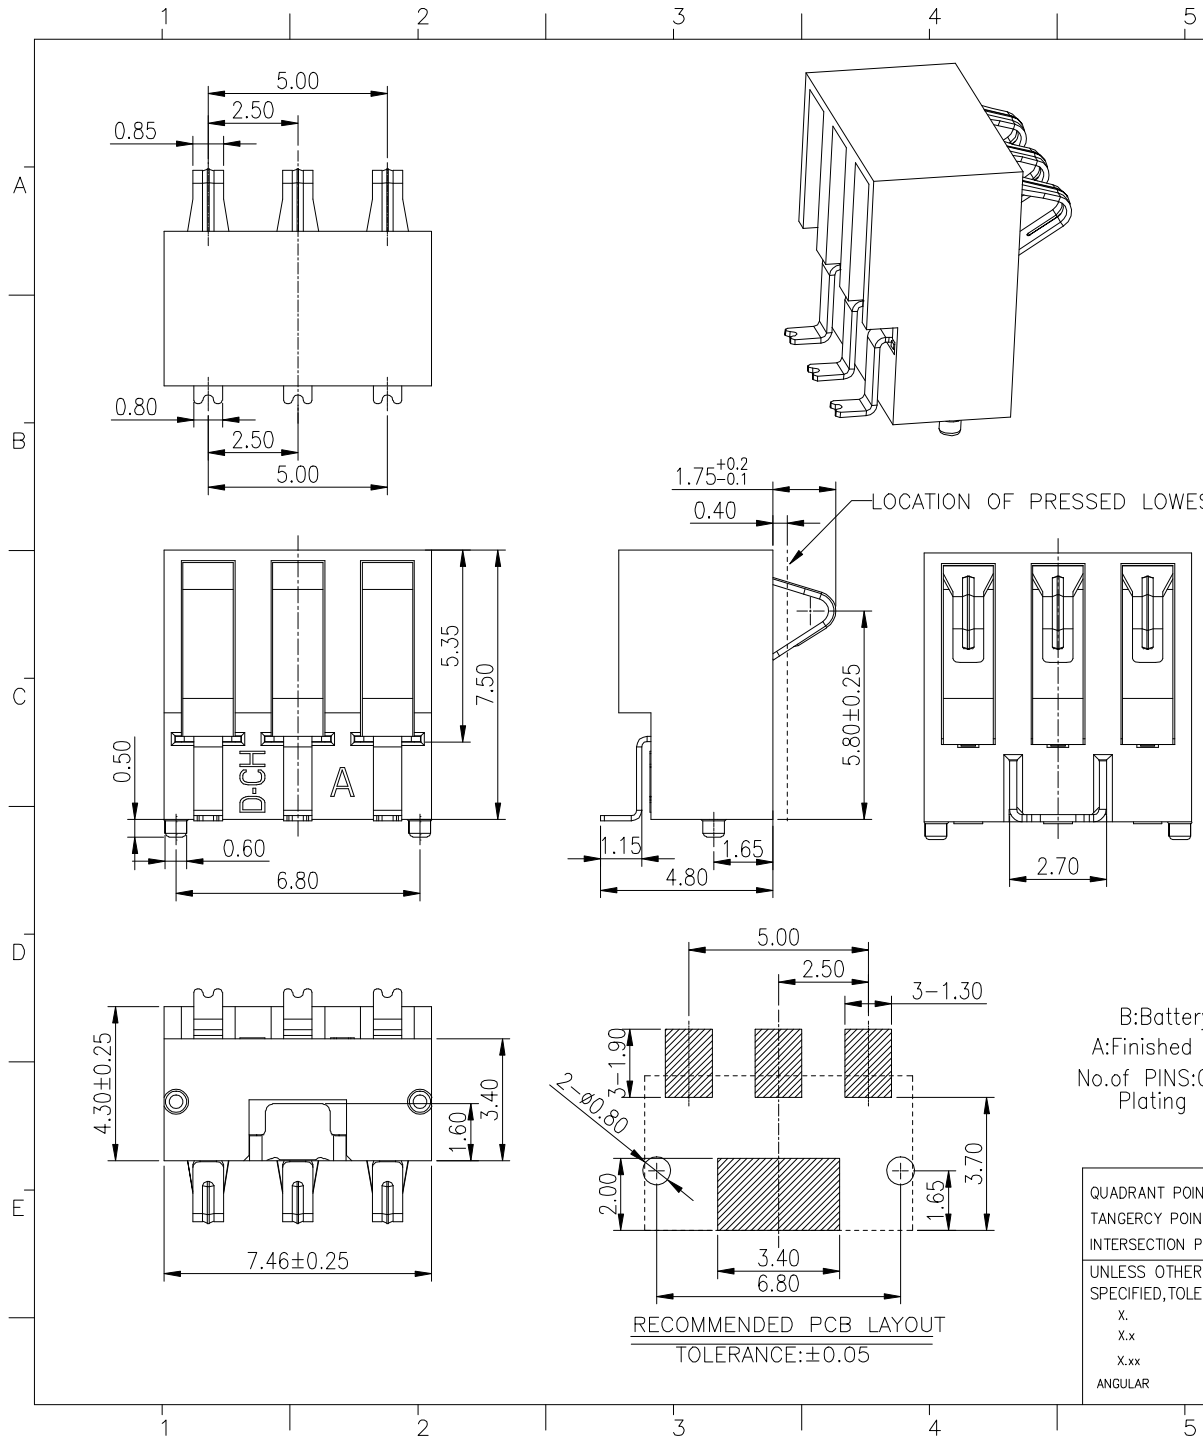

NOTES:

1. MATERIAL:
 - 1.1 Housing:High Temperature Thermoplastic UL94V-0; Color Black.
 - 1.2 Terminal:Copper Alloy.
 - 1.3 Nail:Stainless Steel
2. SPECIALITY:
 - 2.1 Rated current:2.0A
 - 2.2 Rated voltage:30V
 - 2.3 Contact Resistance:50mΩ MAX
 - 2.4 Insulation Resistance:100MΩ MIN 100V DC
 - 2.5 Dielectric withstanding voltage: 100V AC.
 - 2.6 Solder ability:245±5℃, 5±0.5s.
 - 2.7 Durability:5000 Cycles Min.
 - 2.8 Operating condition:Temperature: -30℃~+80℃; Humidity: 80% R.H MAX

Ordering Information

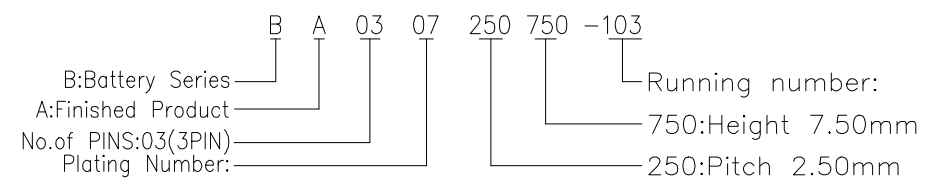

QUADRANT POINT (QP)	SHEN ZHEN D-CHAIN TECHNOLOGY CO.,LTD					
TANGENCY POINT (TP)						
INTERSECTION POINT (IP)						
UNLESS OTHERWISE SPECIFIED, TOLERANCE:	DESIGN	LITAO	DATE	2016.11.02	TITLE:	
X. ±0.25	CHECKED		DATE		3PIN BATTERY PH:2.50mm SMT TYPE WITH 2 POST	
X.x ±0.20	APPROVED		DATE			
X.xx ±0.15	PART NO: BA0307250750-103			REV: 01	SCALE: 1:1	UNIT: mm
ANGULAR ±3'	DRAWING NO: DQBA0307250750-103			SIZE: A4	SHEET: 1/1	