
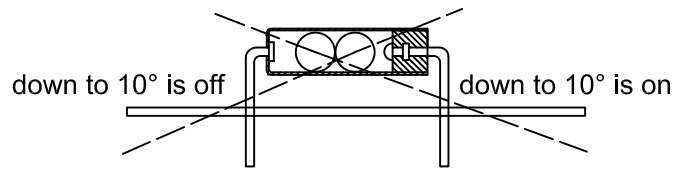




Voltage: < 12V
 Current: < 20mA
 Conduction time: 2ms
 Closed circuit resistance: < 10m ohm
 Open circuit resistance: > 10m ohm
 High temperature resistance: 120 degrees
 Terminal tension: 500gf / min
 Humidity: 25~95%RH
 Operating life: 100000 times



Unit: MM

⑦					
⑥	Rubber stopper	1	PLC		
⑤	Ball	1	2.8 brass	Gold-plated	
④	Ball	1	2.5 brass	Gold-plated	
③	Guide pin A	1	Brass	TIN	
②	Guide pin B	1	Brass	Gold-plated	
①	Steel pipe	1	Brass	Gold-plated	
ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING	REMARK

A4					COMMON TOLERANCE X.XX ± 0.10 X.X ± 0.15 X ± 0.25 ANGULAR ———	UNIT	MM	PROJECTED		PRODUCT NAME:	
A3						DRAWN BY	FUYUAN	CHECKED BY	COCO	MODEL NO:	TPSW-200D-GS
A2						DATE	2019	APPROVAL B	ALEN	Https:	www.rocpcu.tw
A1						<h1>ROCPCU TECHNOLOGY CO.,LTD</h1>					
REV	DATE	REVISION	DESCRIPTION			ISSUE	Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basis of manufacture or sale of apparatus without permission				
	A		B		C	D	E	F	G		