
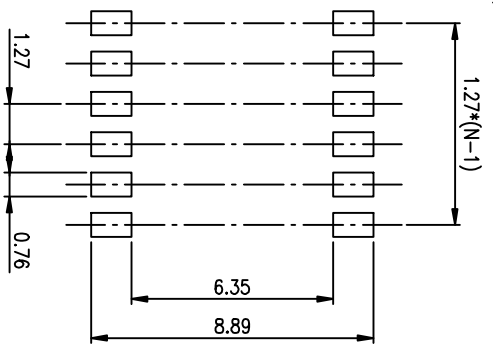

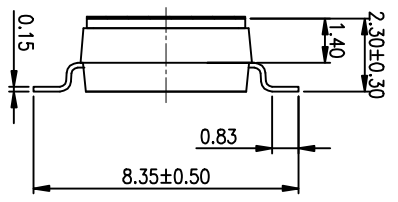


PRODUCT NO.	DSHP06TSGE1
RoHS compliant	



NOTES :1.Specification:

- 1>.Operating force:1000gf Max
- 2>.Operating Temperature: -40° to+85°
- 3>.Storage Temperature: -40° to+85°
- 4>.Electricalife Life:1000cycles 25mA 24VDC
- 5>.Mechanical Life:3000cycles Operations


2. PLATING:
GOLD FLASH 1u"(min.) SOLDERTAIL,
3u" GOLD PLATING ON THE CONTACT AREA,
WITH 50u" NICKEL UNDERPLATINGOVERALL.
3. PART NUMBER DESCRIPTION :
DSHP XX I S G E I

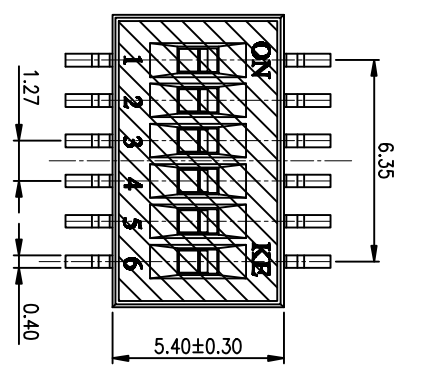

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)



[Schematic]



1	Actuator	UL94 V0	White
2	Cover	UL94 V0	Black
3	Movable	Beryllium Copper	3u" Gold
4	Terminal	Brass	1u" Gold
5	Base	UL94 V0	Black
6	Terminal Contact	Brass	3u" Gold
7	Terminal Contact	UL94 V0	0.05mm

Number	Part Name	Material	Finished
1	Actuator	UL94 V0	White
2	Cover	UL94 V0	Black
3	Movable	Beryllium Copper	3u" Gold
4	Terminal	Brass	1u" Gold
5	Base	UL94 V0	Black
6	Terminal Contact	Brass	3u" Gold
7	Terminal Contact	UL94 V0	0.05mm

TOLERANCE UNLESS OTHERWISE SPECIFIED	INSPECTION COPY	
LINER	ANGLES	
0 ± 0.25	0 ± 2°	BY DSHP SERIES PITCH 1.27mm PRODUCT FAMILY DSHP SERIES PRAT NO. DSHP06TSGE1
.00 ± 0.15	.0 ± 1°	
.000 ± 0.10	.00 ± 0.5°	FILE NO. DSHP06TSGE1-A SIZE UNIT SCALE SHEET REV. A4 mm Z : 1 1OF 1 A
DESIGN	kathy	03/20/12
DRAWING		
CHECK		
APPRO.		