

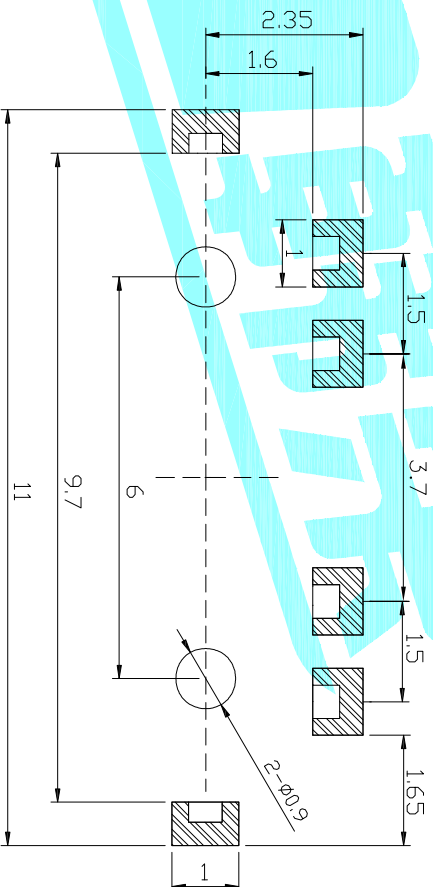


- Typical Specifications
1. Rating : 12V 0.1A DC
 2. Operating force: 130±50gf
 4. Operating Life : 10,000 cycles

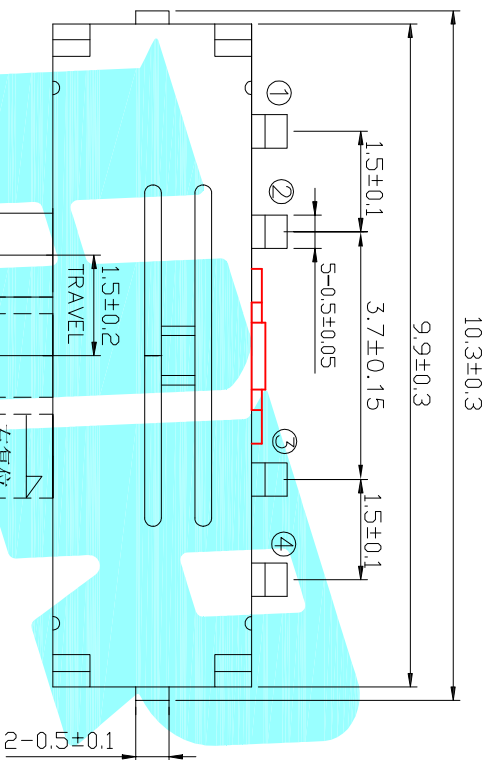

P.C.B layout

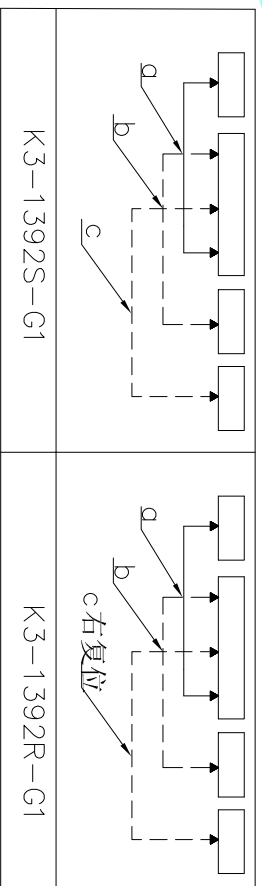

Schematic(Shorting)

ITEM	PART NAME	TER.NO.	QTY.	MATERIAL	FINISHING	REMARK
⑥	Cover	—	1	Stainless Steel	Natural	—
⑤	Spring	—	1	Stainless Steel	Natural	—
④	Contact Clip	—	1	C5210	Ag Clad	—
③	Knob	—	1	PA	Black	—
②	Base	—	1	PA	Black	—
①	Terminal	—	5	Brass	Ag Plated	—

APPROVALS	DATE	MATERIAL	FINISHING	REMARK
K3-1392S-G1				
K3-1392R-G1				

APPROVALS	DATE	TITLE:	PART NO.
APPROVALS	DATE	TITLE:	PART NO.

APPROVALS	DATE	TITLE:	PART NO.
APPROVALS	DATE	TITLE:	PART NO.

APPROVALS	DATE	TITLE:	PART NO.
APPROVALS	DATE	TITLE:	PART NO.

APPROVALS	DATE	TITLE:	PART NO.
APPROVALS	DATE	TITLE:	PART NO.

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

APPROVALS	DATE	TITLE:	PART NO.
APPROVALS	DATE	TITLE:	PART NO.

APPROVALS	DATE	TITLE:	PART NO.
APPROVALS	DATE	TITLE:	PART NO.