



SCHEMATIC (NON-SHORTING)



PS-22F68XX

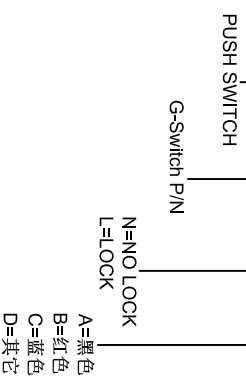

G-Switch Specification:

Electrical Specifications: 0.5A 30VDC
 Contact Resistance : $\leq 100m\Omega$
 Insulation Resistance: $\geq 100M\Omega$ DC125V
 Withstand Voltage: AC125V 1 minute
 Operating Temperature: -25°C~+65°C
 Storage Humidity: $\leq 85\%$ RH
 Electrical Life: 10,000
 Mechanical Life: 100,000



G-Switch Electronic (HongKong) CO.,Ltd.

Unless otherwise specified, Tolerance:
 X ± 0.30
 X.X ± 0.20
 X.XX ± 0.15
 X.XXX ± 0.10
 Angles 1:3

DESIGN	Bright Lee	DATE	2016.05.29	Mold code:	
CHECKED		DATE		PS-22F68	
APPROVED		DATE			
http://www.dg-switch.com				REV: X1	SCALE: 4:1
TEL:0769-82388879				SIZE: A4	SHEET: 1/1
				UNIT: mm	

