



| PANEL CUT-OUT | | |
|---------------|-------------|-----------|
| Z | Y | X |
| 0.70~1.25 | 10.50~10.70 | 28.9~29.1 |
| 1.25~2.00 | 10.50~10.70 | 29.1~29.2 |
| 2.00~3.00 | 10.50~10.70 | 29.2~29.3 |

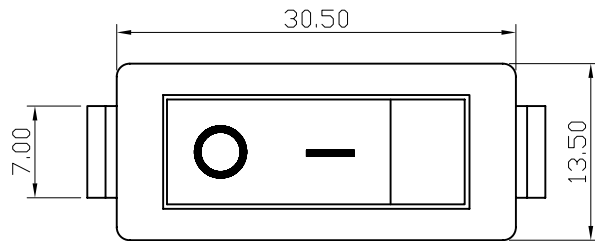

NOTES:

1. Rating:

VDE ENEC 16(4)A 250V AC T85

KC 16(4)A 250V AC T85

CQC 16(4)A 250V AC T105/55

UL cUL 16GPA 125V AC/16GPA 250V AC T105/55

2. Circuit Diagram: 2P ON-OFF

3. Terminal Strength: ≥80N

4. Electrical life: ≥10000 cycles

5. Withstand Voltage: Withstand Voltage: 1500VAC 1min
Terminals to Button: 3000VAC 1min
Leakage Current: 1mA

6. Current resistance: ≤50mΩ (initial)

7. Insulation resistance: ≥100MΩ

8. Body Material: NYLON 66 94V-0-2

| | | | | | | | | | | | | |
|------|------|----------------------|-------|--------------------|---------------|----------|-----------|-------------|--------------|-----------|------------------|------|
| A4 | | | | 普通公差: | 深圳市华灿天禄电子有限公司 | | | | | | | |
| A3 | | | | COMMON TOLERANCE : | | | | | | | | |
| A2 | | | | UP TO 5 | ±0.20 | 单位 | mm | 投影 | 品名 | 跷板开关 | 比例 | Free |
| A1 | | | | ABOVE 5 TO 30 | ±0.30 | UNIT | | PROJECTED | PRODUCT NAME | | SCALE | |
| REV. | DATE | REVISION DESCRIPTION | ISSUE | ABOVE 30 | ±0.50 | 绘图 | 周金勇 | 核对 | 梁金勇 | 型号 | RS606 | |
| | | | | ANGULAR | ±5° | DRAWN BY | | CHECKED BY | | MODEL NO. | | |
| | | | | | | 日期 | 2015.8.17 | 核准 | 周培雷 | 图号 | RS606-1010011CBB | |
| | | | | | | DATE | | APPROVAL BY | | DWG NO. | | |