
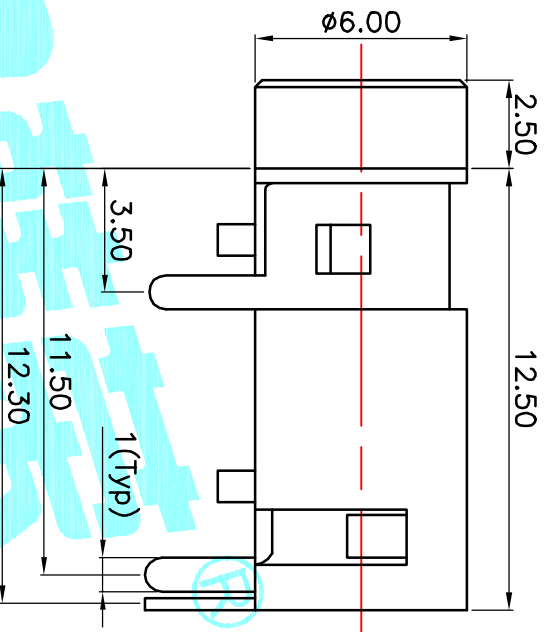


P.C.B LAYOUT(copper-sided view)

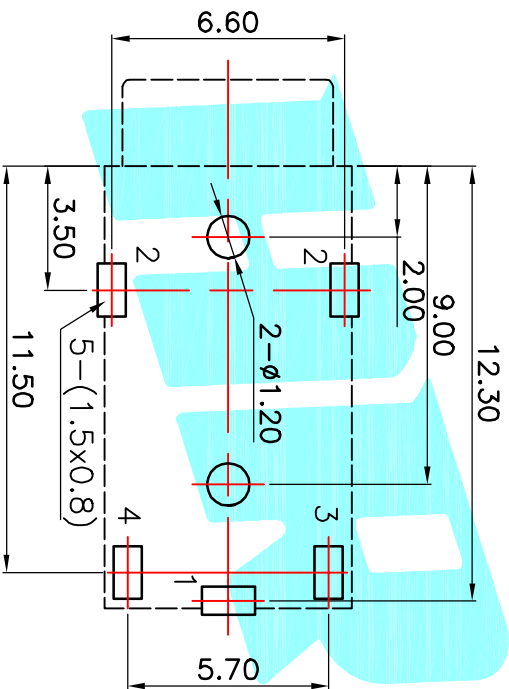

Model No.	L=3.0	PJ-3220-A	PJ-3220-B
	L=6.5	PJ-3220-C	PJ-3220-D
Schematic			

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3-20N
 Operating Life:5,000cycles

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

② Terminal	5	Phosphor bronze	Au Plating
① Housing	1	Nylon	Black
ITEM	PART NAME	TERN.O.	QTY.
APPROVALS		DATE	
DRAWN	J.X.Zhang	2013/11/11	
CHECKED		TITLE:	PHONE JACKES
APPROVALS		PART NO.	PJ-3220
TOLERANCES ARE		SCALE:	1:1
30 ^{±0.15}	±0.30	ANGLE	
10 ^{±0.30}	±0.20	UNIT:	mm
5 ^{±0.10}	±0.15	DRAWING NO.	
~ 5	±0.10	±Z'	
DRAWN		DATE	
CHECKED		TITLE:	PHONE JACKES
APPROVALS		PART NO.	PJ-3220
TOLERANCES ARE		SCALE:	1:1
30 ^{±0.15}	±0.30	ANGLE	
10 ^{±0.30}	±0.20	UNIT:	mm
5 ^{±0.10}	±0.15	DRAWING NO.	
~ 5	±0.10	±Z'	

ELECTRONICS CO.,LTD	
PROJ. SHEET 1 OF 1	